


Main Source Sending Audio


MC-BB Black Box

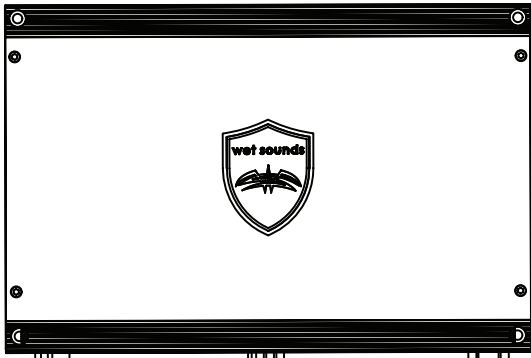

Aux Out

Source that is going to provide audio will send signal from its Aux Out to the A-link Aux IN.


RED Aux IN



RED LED

(Transmitter)
Unit that sends the audio to the other A-link (Receiver)


Second Source receiving Audio

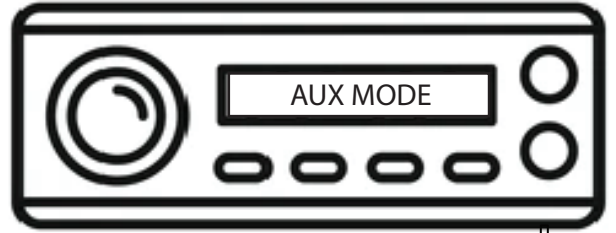

Source that is receiving audio from the Second A-link has to have AUX-IN. and the source needs to be in AUX Mode. if the Source Unit has RCAs for AUX-IN then you will need a WWX-RCA-3.5MM 2ft cable.

Aux IN

BLACK Aux Out




GREEN LED

(Receiver)
will send the audio to the 2nd Source unit from its Aux OUT

bonding your a link plus

Each a link plus will be set to Receive Mode when initially powered on. To use a link plus, one (1) of the units must first be set to Transmit Mode.

To set one (1) a link plus to Transmit Mode, simply tap the Power Button  after the unit is powered on. The Mode LED will change from green to red. Your a link plus units will automatically Bond, and are now ready to broadcast audio.

Tapping the Power Button  one (1) time will switch a link plus between Transmit and Receive Modes at any time.

Receive / Transmit Mode

 1 click

