




ZERO SERIES

High-Output Coaxial Speakers

Owner's Manual



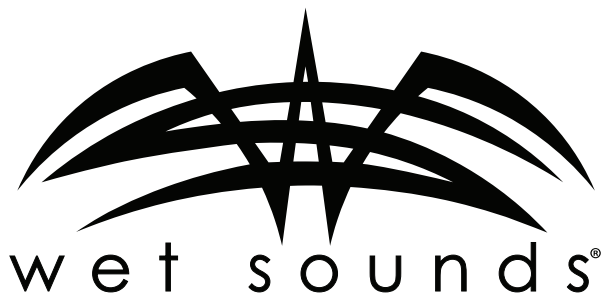

Congratulations!

Thank you for choosing this Wet Sounds® product!

Wet Sounds is synonymous with live, loud, and clear audio solutions, built to serve the needs of the marine and powersports enthusiast. The ZERO Series is a first of its kind innovation for Wet Sounds, taking the legendary REV tower speaker performance and re-imagining it for optimal use in more confined spaces.

The Wet Sounds ZERO Series represents our most uncompromising approach to powersports, marine, and outdoor audio. Every Wet Sounds ZERO speaker is engineered from the ground up for uncompromising performance in shallow-mount applications. ZERO Coaxials use a thermo-formed inverted Santoprene® surround and PMGS (Poly-Mica-Glass-Spheres) composite cone deliver controlled excursion, strength, and stability at high output levels. A reinforced Conex® aramid spider ensures long term reliability under heat and vibration. For open air clarity and projection, each ZERO coaxial features a PEN (Polyethylene Naphthalate) Bullet Tweeter which improves stiffness, heat resistance, and internal damping. Oversized neodymium motors maximize efficiency and output in a shallow mount footprint. Together, these design technologies create consistent, sound built to withstand water, UV exposure, vibration, and extreme real-world conditions with no compromises.

Please take a moment to read the owner's manual and installation guide before beginning installation. **Make note of your product's serial number, and be sure to retain your proof of purchase. You will need this documentation for product support.** If you have any questions or concerns, please contact a certified Wet Sounds dealer or Wet Sounds Tech Support.

SERIAL NUMBER: _____

1-877-WET-SPKR (1-877-938-7757)
www.wetsounds.com

Table of Contents

Please take a moment to look over this instruction manual before enjoying the product.

ZERO 6 | ZERO 8 Technology Specifications 3

ZERO 6 | ZERO 8 Installation Specifications 4-5

ZERO 57 | ZERO 69 Technology Specifications 6

ZERO 57 | ZERO 69 Installation Specifications 7-8

Limited Warranty 9


Technology Specifications

ZERO 6 SPEAKER SPECIFICATIONS

RMS: 100W
Peak: 200W
Impedance: 4Ω
Frequency Response: 65Hz - 20kHz
Sensitivity: 90 dB at 1W/m
Mounting Depth: 2.72"
Hole Cut Out: 5.63"
Weight: 2.4 lbs (1.0 kg)

Grille Options

XZ Grille



Grille Dimensions


ZERO 6: 6.89" x .91"

ZERO 8: 8.96" x 1.11"

ZERO 8 SPEAKER SPECIFICATIONS

RMS: 150W
Peak: 300W
Impedance: 4Ω
Frequency Response: 55Hz to 20kHz
Sensitivity: 91.5 dB at 1W/m
Mounting Depth: 3.32"
Hole Cut Out: 7.36"
Weight: 3.4 lbs (1.5 kg)

XY Grille




ZERO 6: 6.97" x .96"


ZERO 8: 8.94" x 1.24"

Speaker Dimensions

ZERO 6


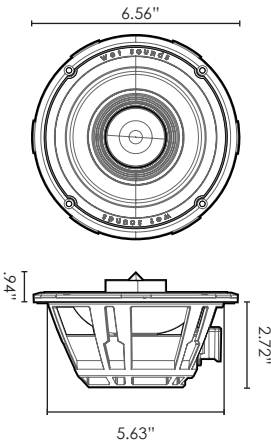


ZERO 8


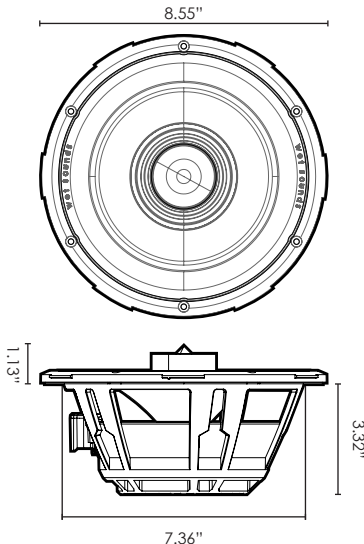


Installation Specifications


- 1 We recommend checking if the mounting surface is flat with a square or level. Mounting to a curved surface will damage the product.



- 2 Tape the surrounding surface to prevent damaging the finish, and avoid cutting outside the cut line to prevent improper fitment.




- 3 For speaker alignment, the terminal indicates the bottom of the speaker, and the opposing lock tabs help for horizontal alignment.

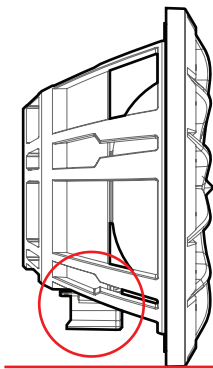

Top


Bottom

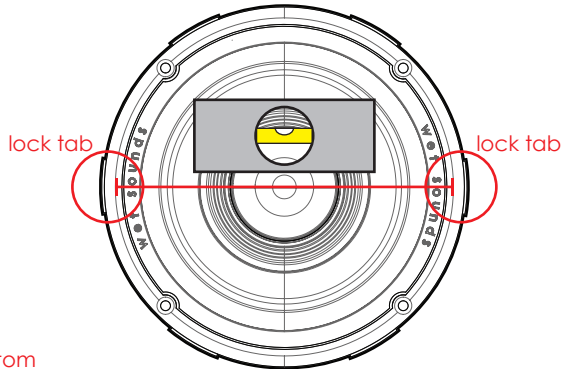


Continued on the next page.

Installation Specifications


- 4 Pre-drill the screw locations to prevent surface cracking.




- 5 Fasten the speaker with stainless steel 5/32" x 1.25" Phillips screws.




- 6 Place the grille on the speaker in a 45° angle.



- 7 Apply downward pressure on the grille and twist clockwise to lock.



- 8 Connect the speakers to the amplifier or source unit using spade connectors for each terminal.

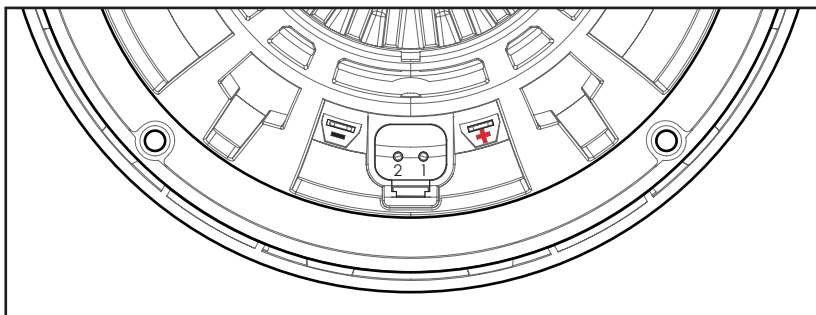

Note: ZERO Series has a standard Deutsch connector compatible connection. (PN: DT04-2P) PIN 1 (+) PIN 2 (-)

Technology Specifications

ZERO 57 SPEAKER SPECIFICATIONS

RMS: 100W

Peak: 200W

Impedance: 4Ω

Frequency Response: 65Hz - 20kHz

Sensitivity: 90 dB at 1W/m


Mounting Depth: 2.64"

Hole Cut Out: 6.37" x 4.97"

Weight: 2.3 lbs (1.0 kg)

Speaker Dimensions

ZERO 57*

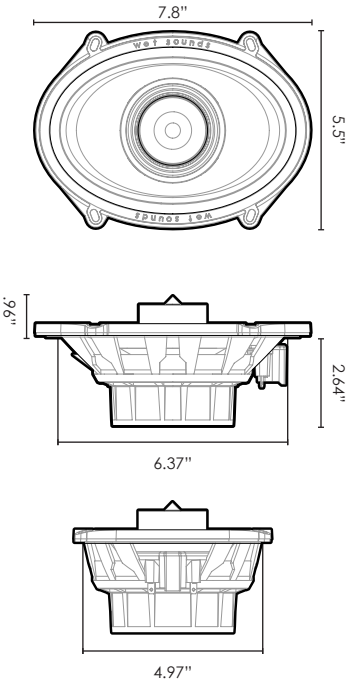

ZERO 69 SPEAKER SPECIFICATIONS

RMS: 150W

Peak: 300W

Impedance: 4Ω

Frequency Response: 55Hz to 20kHz


Sensitivity: 91.5 dB at 1W/m

Mounting Depth: 3.32"

Hole Cut Out: 9.27" x 6.40"

Weight: 3.1 lbs (1.4 kg)



ZERO 69

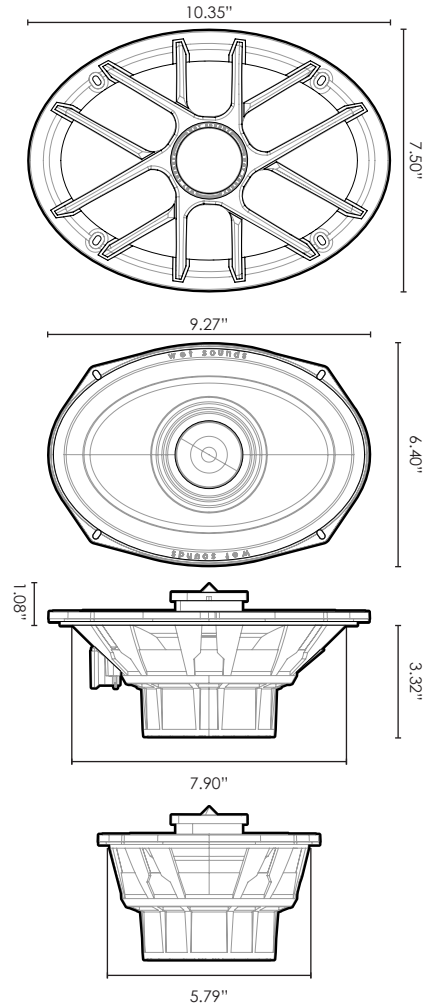



*Only the ZERO 69 comes with a grille. No grille is available for the ZERO 57.

Installation Specifications


- 1 We recommend checking if the mounting surface is flat with a square or level. Mounting to a curved surface will damage the product.



- 2 Tape the surrounding surface to prevent damaging the finish, and avoid cutting outside the cut line to prevent improper fitment.




- 3 For speaker orientation, the mounting tabs indicate the top and bottom of the speaker.

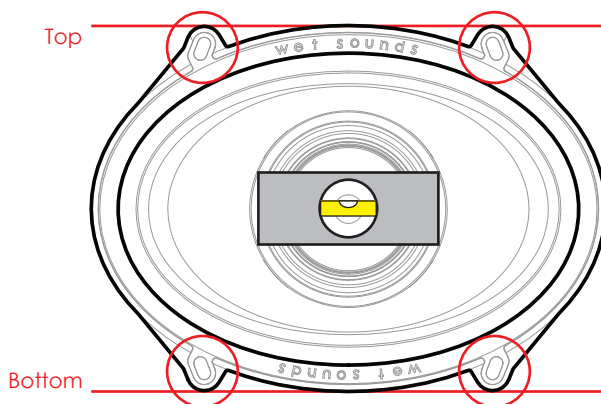


Continued on the next page.

Installation Specifications


- 4 Pre-drill the screw locations to prevent surface cracking.




- 5 **ZERO 5x7:** Fasten with stainless steel 5/32" x 1.25" Phillips screws.



- 5 **ZERO 6x9:** Place the XZ grille on the speaker. Fasten the speaker and grille using the stainless steel 5/32" x 1.25" Phillips screws.

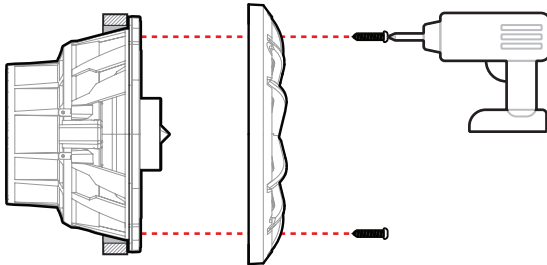

- 7 Connect the speakers to the amplifier or source unit using spade connectors for each terminal.

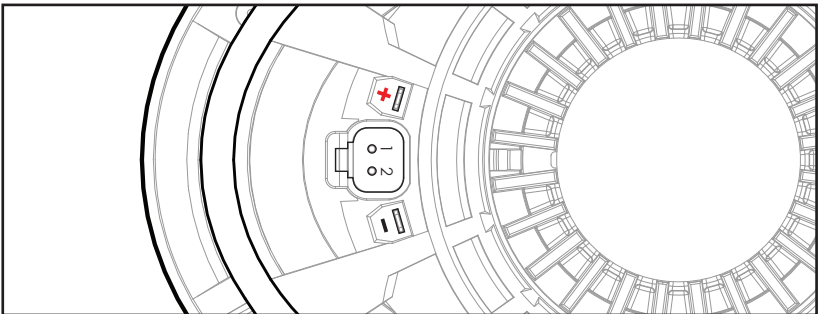

Note: ZERO Series has a standard Deutsch connector compatible connection. (PN: DT04-2P) PIN 1 (+) PIN 2 (-)

LIMITED WARRANTY

What This Warranty Covers

This is a “limited” warranty. This warranty covers any defects in materials and workmanship. This warranty applies only to the original purchaser and is not transferable. This warranty is valid only if the original purchase was made from an authorized Wet Sounds dealer.

How Long Coverage Lasts

This warranty lasts for 2 years from the date of purchase. It is recommended to document your product serial number on the front of this manual and attach your receipt. These documents are required to verify your warranty coverage and expiration.

What Is Not Covered

This warranty does not cover fading or discoloration caused by exposure to sunlight or chemicals such as ammonia, household bleach, or any cleaning materials that contain abrasive substances. Wet Sounds, Inc. does not cover expenses for removal or reinstallation. Additionally, shipping to Wet Sounds, Inc. must be paid by the purchaser.

This warranty is void and inapplicable if Wet Sounds determines that the product has been abused or misused, including but not limited to damage caused by accident, mishandling, improper installation, removal of the inline fuse on the power connection, negligence, normal wear and tear, excessive water or heat damage, freight or shipping damage, or products that have been disassembled by anyone other than Wet Sounds technical staff.

Wet Sounds will not be responsible for any incidental or consequential damages, except to the extent provided or prohibited by applicable law. This warranty gives you specific rights, and you may also have other rights that vary from state to state.

What Wet Sounds, Inc. Will Do

Wet Sounds, Inc. will repair any part of your product that proves to be defective in materials or workmanship. If repair is not possible, Wet Sounds will replace the product. If deemed necessary, Wet Sounds, Inc. will replace the entire product with a refurbished unit, or with a model of similar value if the original model is no longer available.

Labor costs and materials required to complete this service will be provided at no charge to the purchaser. Additionally, return shipping from Wet Sounds, Inc. to the purchaser will be paid by Wet Sounds.

How To Get Service


Contact Wet Sounds, Inc. by phone at **(877-938-7757)** or by email at **warranty@wetsounds.com**. A service representative will confirm whether the issue is caused by a defective product and whether it is covered under warranty.

The service representative will issue a Return Merchandise Authorization (RMA) and provide additional details to obtain service for your product.

Do not return your product without a valid RMA.

Internet Warning

Wet Sounds, Inc. products sold on non-authorized websites or internet auction sites are void of all manufacturer warranties. Please contact Wet Sounds at **(877-938-7757)** or visit **www.wetsounds.com** for a list of authorized online sellers or to locate an authorized installing retailer near you.

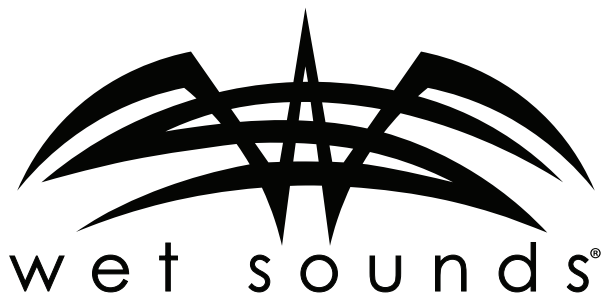

Wet Sounds, Inc.
www.wetsounds.com
877-938-7757

2975 Louise Street
Rosenberg, Texas 77471 USA



ZERO SERIES

© 2026 Wet Sounds, Inc. All Rights Reserved. WET SOUNDS and associated logos where applicable are registered trademarks of Wet Sounds Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.

08/28/26