




REVO 12 FA 4Ω

ENCLOSURE SPECS


REVO 12 FA 4Ω Specs

Fs	40 Hz
Qts	0.93
Qms	5
Qes	1.15
Vas	34.4 L
Xmax	11.4 mm
Sd	483.1 cm ²
Piston Diameter	10"
Re	3.5 Ω
Z	4 Ω
SPL	84.7 dB
Pe	400-800W
Le	1.4 mH
BL	10.8 T/m
Mms	150.6 g
Speaker Displacement	.18 ft ³
Mounting Diameter	11.08"
Mounting Depth	5.33"
Hvc	27.9 mm
Hag	8 mm
Dvc	2.5"

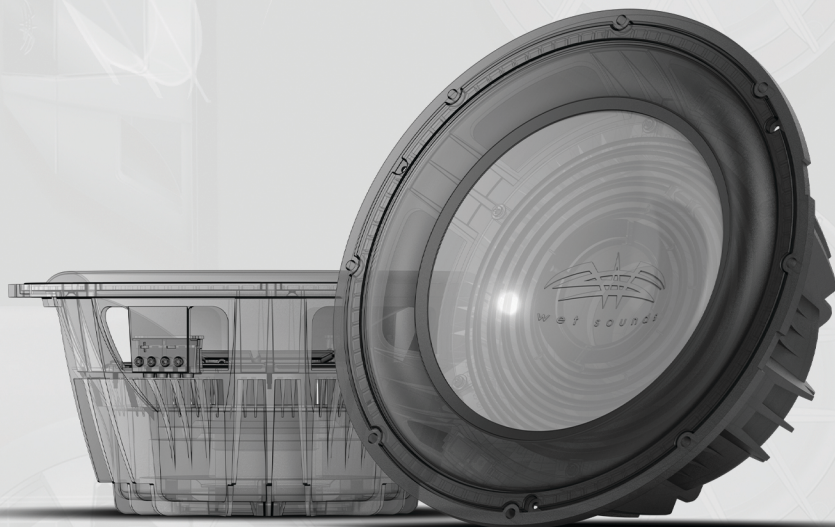


Box Specs	Sealed	Slot Ported	Round Ported	Free Air
Vb (Net Air Space) *	2 - 4 ft ³	N/A	N/A	Yes
Fb/Q (Box Tuning)	1.2 - 1.1			
F3 (Output Down 3dB)	42 - 38 Hz			
Fo/Fc (Resonance)	51 - 46 Hz			
Port Area	N/A			
Port Length	N/A			
Sub Sonic Filter	25 Hz			


* You must add the size of the port and displacement of the woofer and any bracing to this number

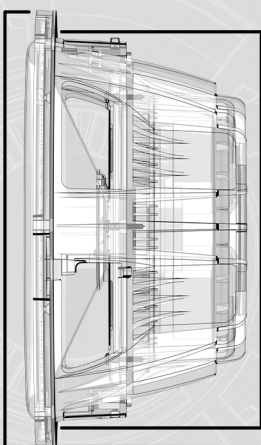

Ø12.76"
(324.104 mm)

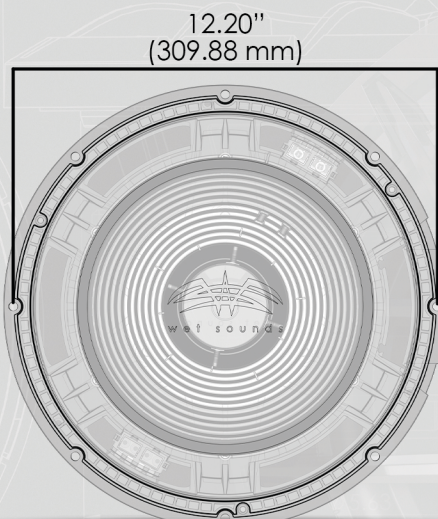

12.20"
(309.88 mm)

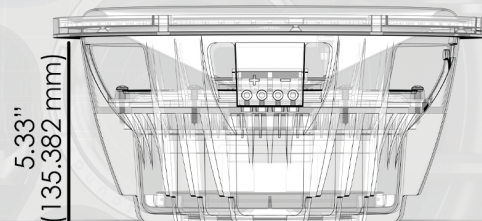


5.33"
(135.382 mm)

for more information call us toll-free 1.877.938.7757




REVO 12 FA 4Ω


ENCLOSURE SPECS

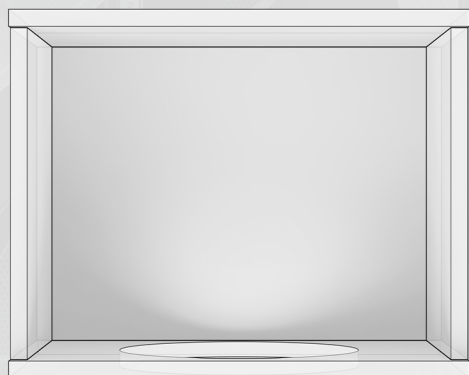

TOP VIEW (shown with top off)

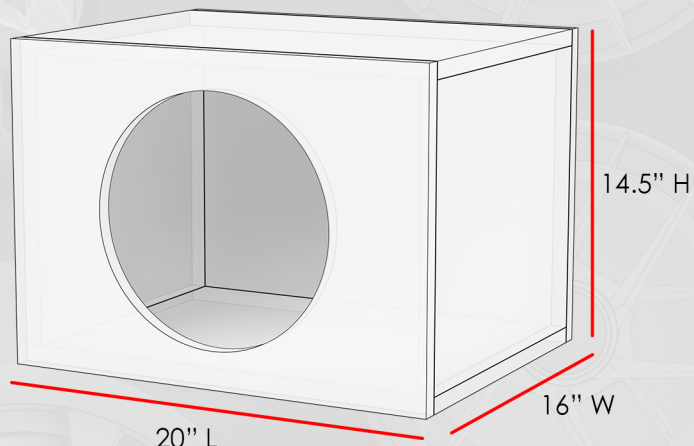


REVO 12 FA 2.0 ft³ Sealed

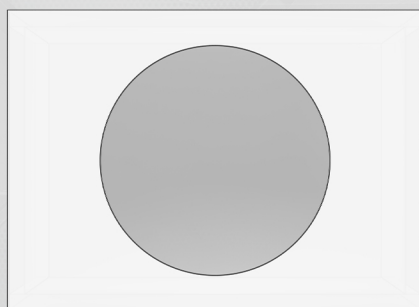

FRONT VIEW



SIDE VIEW

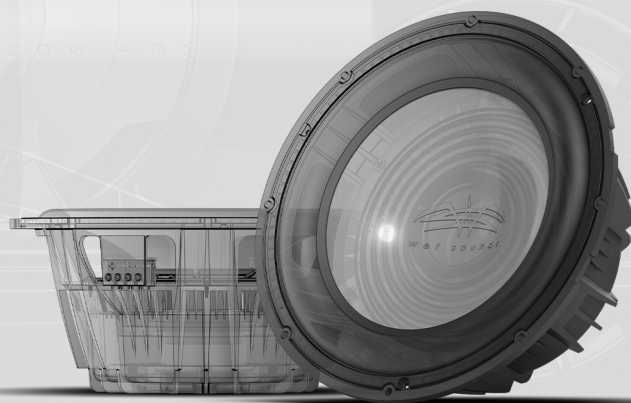

CUT LIST

- (4) 20" x 14.5"
- (2) 13" x 14.5"