




REVO 12XXX

ENCLOSURE SPECS


REVO 12XXX Specs

Fs	35 Hz
Qts	0.42
Qms	6.25
Qes	.45
Vas	23.8 L
Xmax	11.2 mm
Sd	490.8 cm ²
Piston Diameter	10.25"
Re	1.1+1.1 Ω
Z	2+2 Ω
SPL	86.6 dB
Pe	1200-2400W
Le	.33 mH
BL	10.32 T/m
Mms	242 g
Speaker Displacement	.22 ft ³
Mounting Diameter	11.19"
Mounting Depth	6.53"
Hvc	30.9 mm
Hag	11.5 mm
Dvc	4"

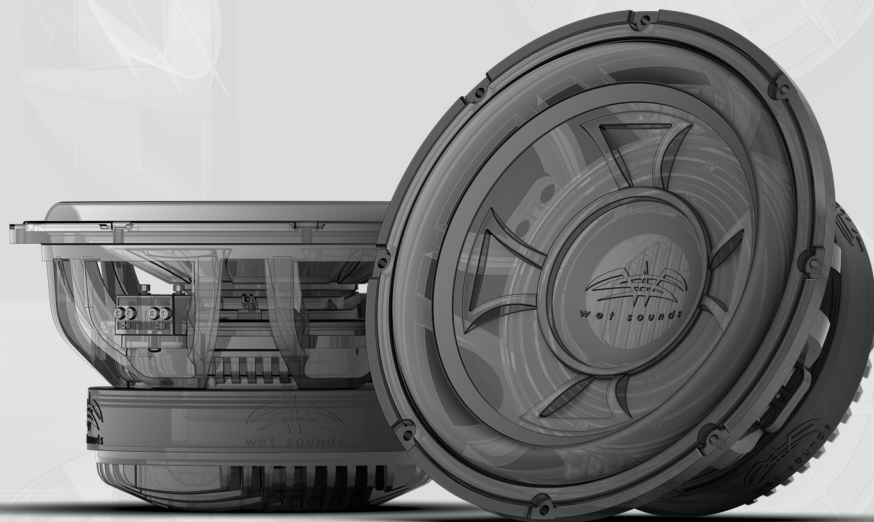

Box Specs	Sealed	Slot Ported	Round Ported	Free Air
Vb (Net Air Space) *	N/A	1.8 ft ³	1.8 ft ³	No
Fb/Q (Box Tuning)		41 Hz	41 Hz	
F3 (Output Down 3dB)		38 Hz	38 Hz	
Fo/Fc (Resonance)		44 Hz	44 Hz	
Port Area		2.375 x 13.5"	(2) 4"	
Port Length		21"	18"	
Sub Sonic Filter		35 Hz	35 Hz	


* You must add the size of the port and displacement of the woofer and any bracing to this number

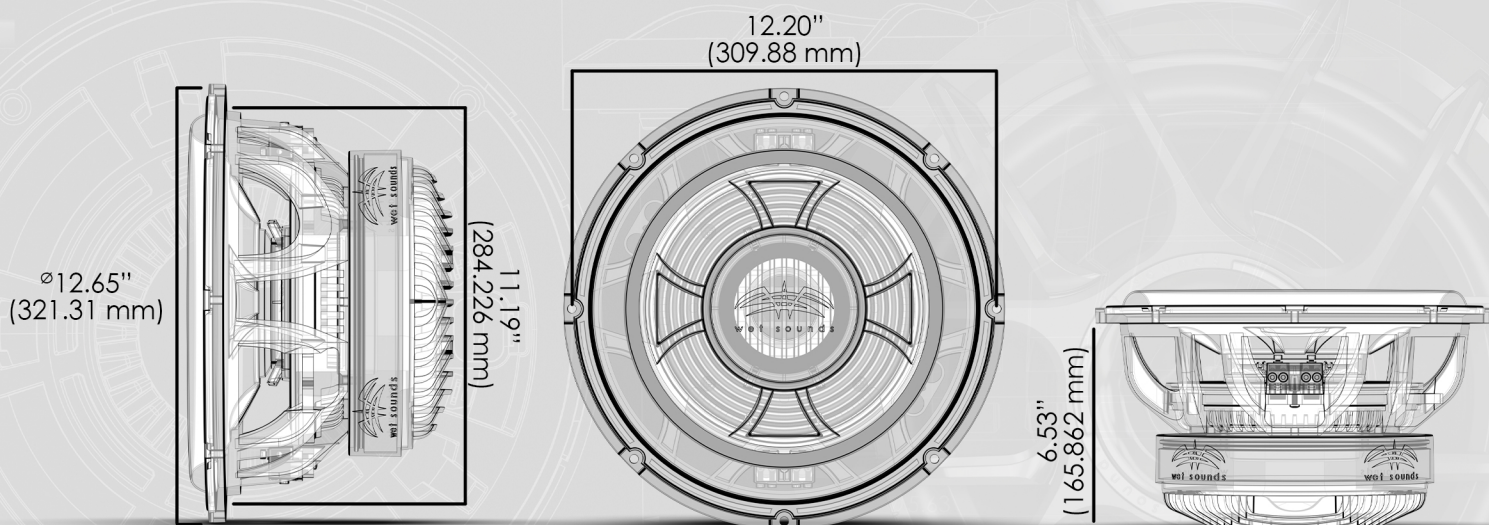




REVO 12XXX


ENCLOSURE SPECS

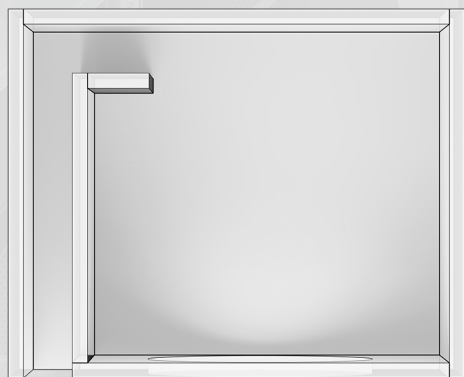


TOP VIEW (shown with top off)

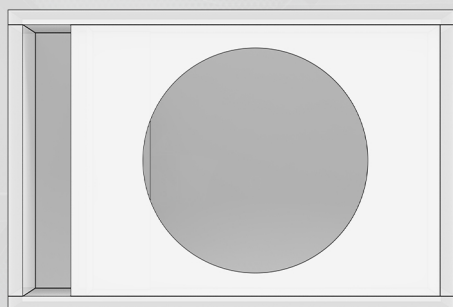


FRONT VIEW

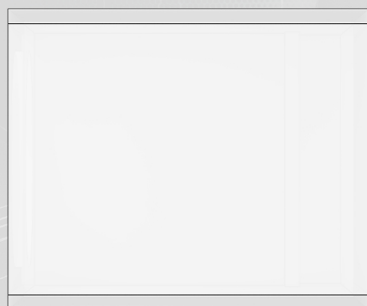

SIDE VIEW

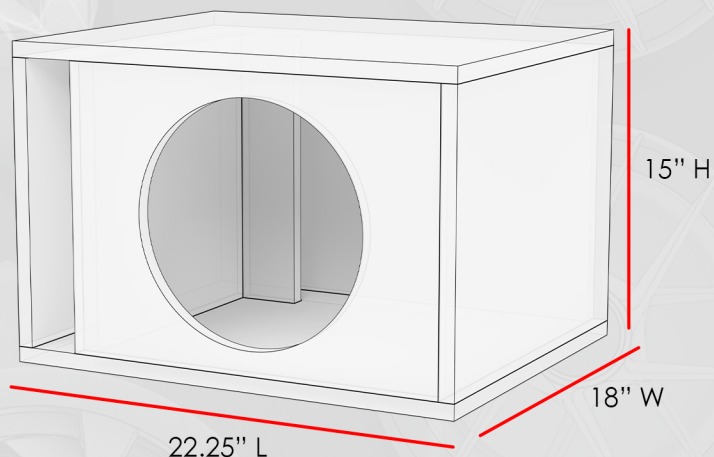

REVO 12xxx 1.8 ft³ Ported

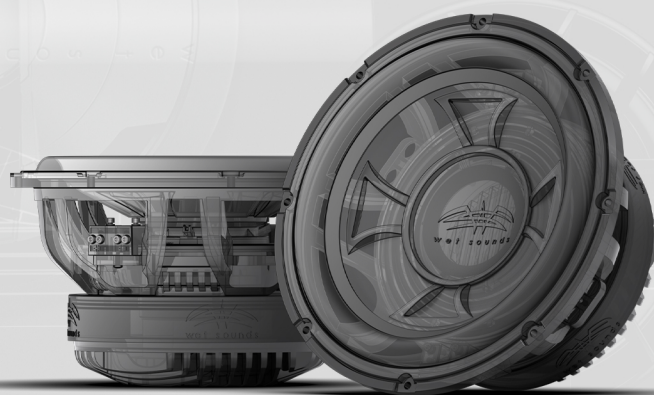

CUT LIST

- (2) 22.25" x 18"
- (2) 13.5" x 18"
- (1) 13.5" x 20.75"
- (1) 13.5" x 18.375"
- (1) 13.5" x 14.125"
- (1) 13.5" x 3"