




REVO 15XXX

ENCLOSURE SPECS


REVO 15XXX Specs

Fs	38 Hz
Qts	0.5
Qms	6.15
Qes	.55
Vas	34.19 L
Xmax	23.2 mm
Sd	855.3 cm ²
Piston Diameter	12.5"
Re	1.05+1.05 Ω
Z	2+2 Ω
SPL	85.8 dB
Pe	2000-4000W
Le	.61 mH
BL	16.15 T/m
Mms	484.14 g
Speaker Displacement	.56 ft ³
Mounting Diameter	14.02"
Mounting Depth	10.57"
Hvc	53 mm
Hag	12.7 mm
Dvc	5"

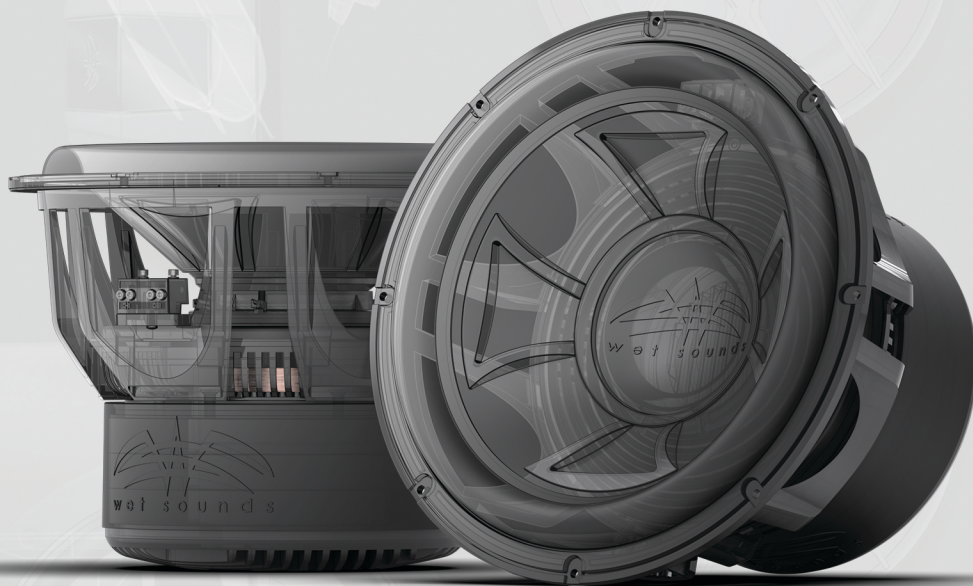

Box Specs	Sealed	Slot Ported	Round Ported	Round Ported 2	Free Air
Vb (Net Air Space) *	N/A	3 ft ³	3 ft ³	3 ft ³	No
Fb/Q (Box Tuning)		40 Hz	40 Hz	40 Hz	
F3 (Output Down 3dB)		36 Hz	36 Hz	36 Hz	
Fo/Fc (Resonance)		43 Hz	43 Hz	43 Hz	
Port Area		(2) 2 x 15"	(4) 4"	(2) 6"	
Port Length		27"	22.125"	25.25"	
Sub Sonic Filter		25 Hz	25 Hz	25 Hz	

* You must add the size of the port and displacement of the woofer and any bracing to this number

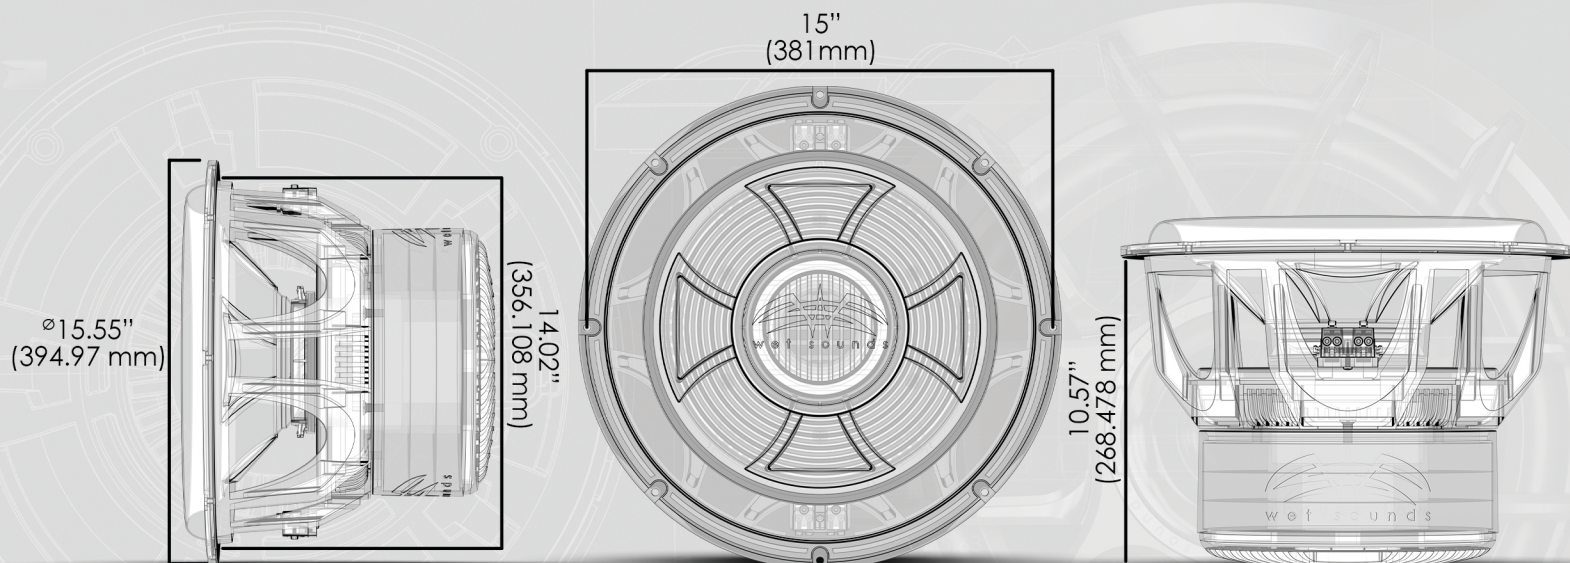


for more information call us toll-free 1.877.938.7757




REVO 15XXX


ENCLOSURE SPECS

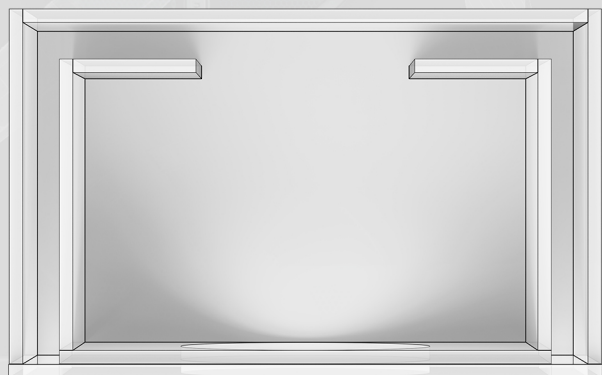


TOP VIEW (shown with top off)

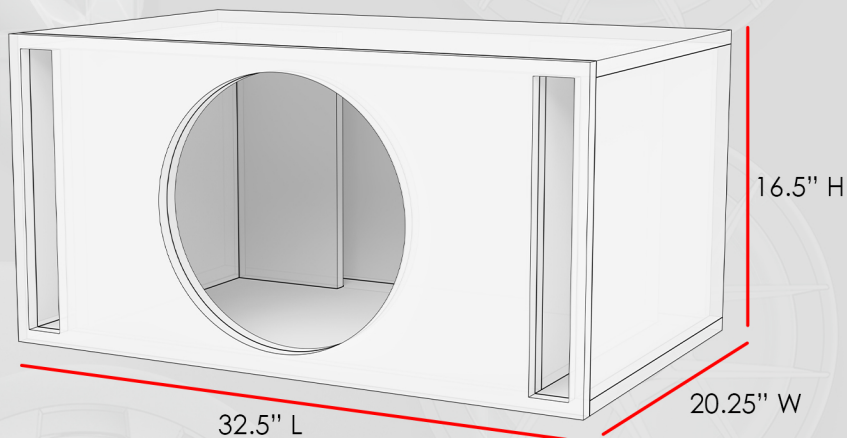


REVO 15xxx 3.0 ft³ Ported Outer Double Baffle

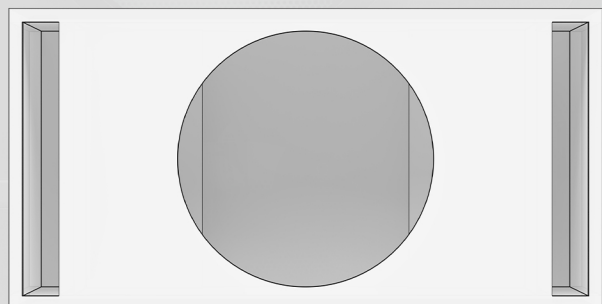

FRONT VIEW

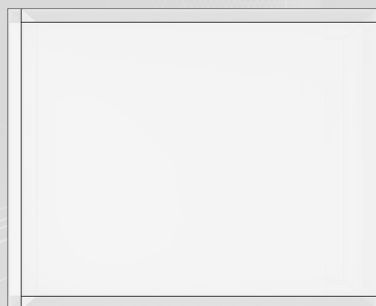

SIDE VIEW

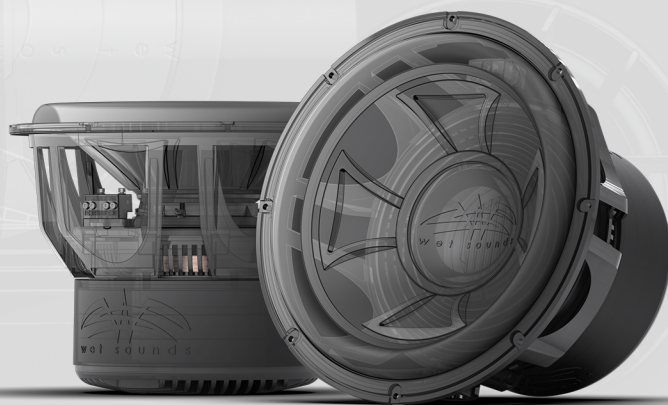

CUT LIST

- (2) 32.5" x 19.5"
- (2) 15" x 19.5"
- (1) 15" x 31"
- (1) 15" x 27"
- (2) 15" x 16"
- (2) 15" x 6.75"
- (1) 16.5" x 32.5"

This is an outer double baffle, it adds strength to the front of the ports but requires a router to cut.