




REVO 8 FA

ENCLOSURE SPECS

REVO 8 FA Specs


Fs	55 Hz
Qts	0.64
Qms	5.5
Qes	0.73
Vas	9.5 L
Xmax	7.8 mm
Sd	213.8 cm ²
Piston Diameter	6.5"
Re	3.5 Ω
Z	4 Ω
SPL	85.2 dB
Pe	150-300W
Le	1.1 mH
BL	9.7 T/m
Mms	56.4 g
Speaker Displacement	.05 ft ³
Mounting Diameter	7.088"
Mounting Depth	3.933"
Hvc	20 mm
Hag	6.4 mm
Dvc	1.5"

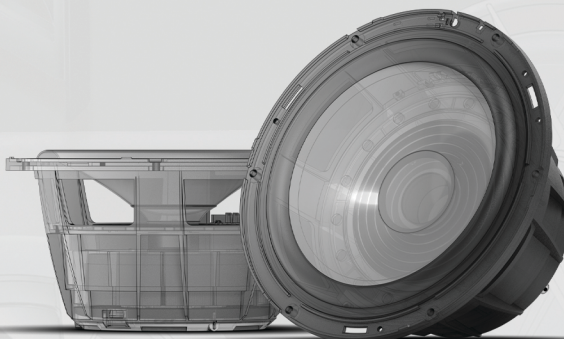

Box Specs	Sealed	Slot Ported	Round Ported	Free Air
Vb (Net Air Space) *	1 ft ³	N/A	N/A	Yes
Fb/Q (Box Tuning)	0.74			
F3 (Output Down 3dB)	61 Hz			
Fo/Fc (Resonance)	64 Hz			
Port Area	N/A			
Port Length	N/A			
Sub Sonic Filter	35 Hz			


* You must add the size of the port and displacement of the woofer and any bracing to this number

ø8.504"
(216.002 mm)

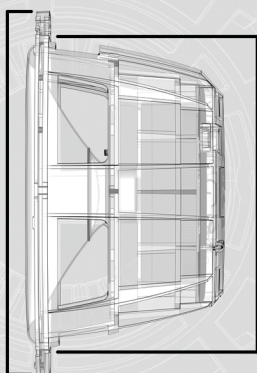


7.008"
(178.003 mm)

8.110"
(205.994 mm)

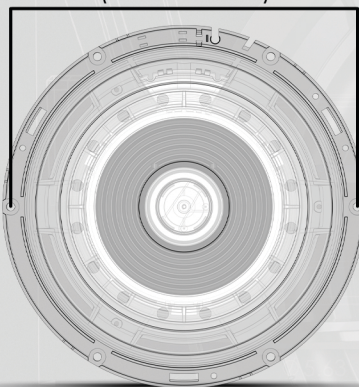

3.933"
(99.8982 mm)

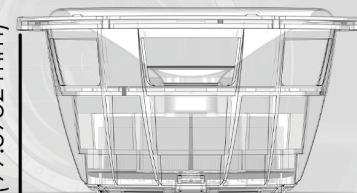


for more information call us toll-free 1.877.938.7757




REVO 8 FA

ENCLOSURE SPECS

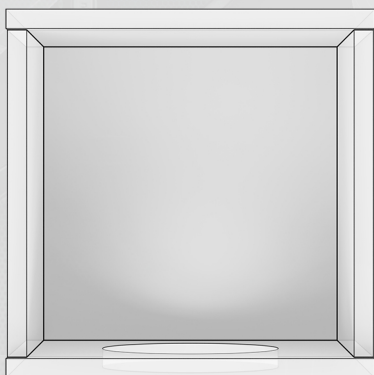


TOP VIEW (shown with top off)




FRONT VIEW



SIDE VIEW

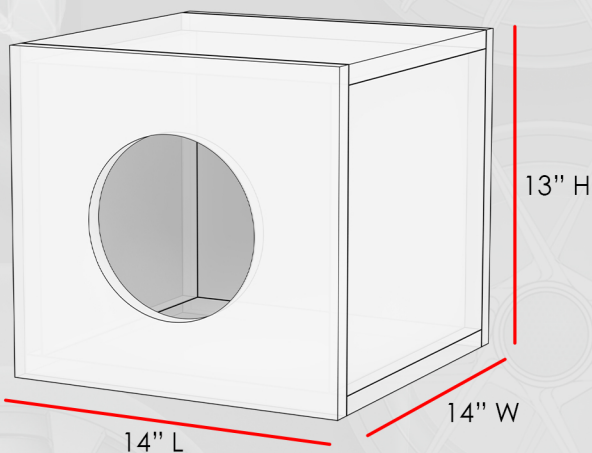

REVO 8 FA 1.0 ft³ Sealed

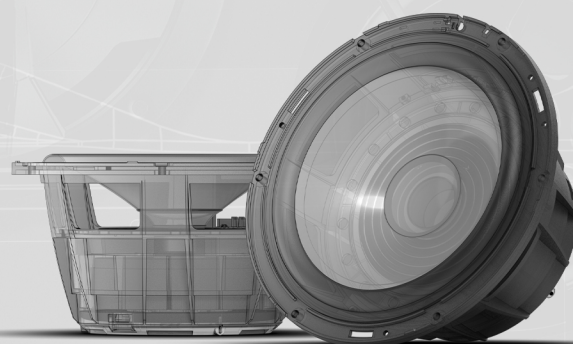

CUT LIST

- (2) 14" x 13"
- (2) 14" x 12.5"
- (2) 11.5" x 12.5"